


# PNEUMATIC GRIPPER FEEDS J380

Strip cross section 80 mm<sup>2</sup>

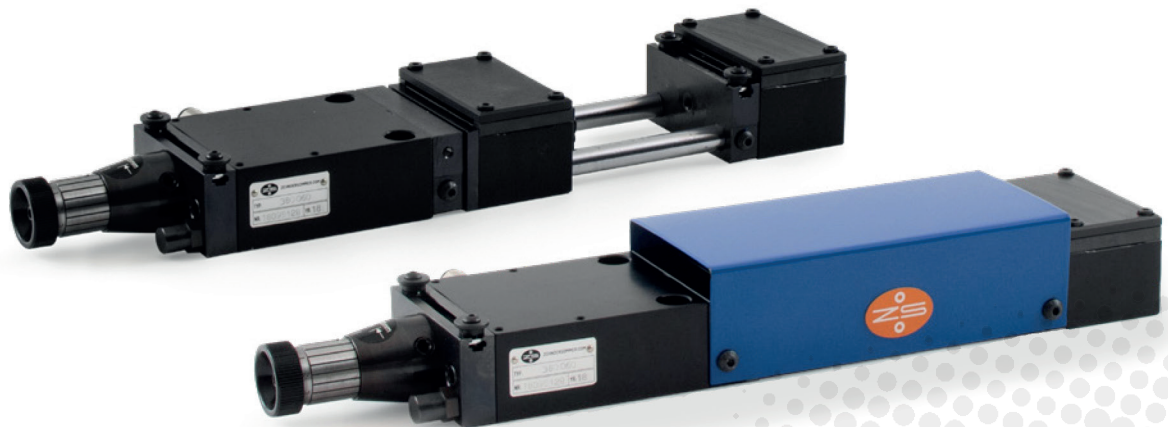

- Clamping force 580 N at 6 Bar
- Traction force 275 N at 6 Bar

## SCOPE OF DELIVERY AND OPTIONS


- Feed device complete with cover
- Pneumatic Control with solenoid valve and connecting hoses
- Pilot release
- Mounting bracket
- Clamping elements made of polished steel
- Clamping element cannulated or Nylon
- Clamping element according client specifications



# PNEUMATIC GRIPPER FEEDS J380



PERFORMANCE

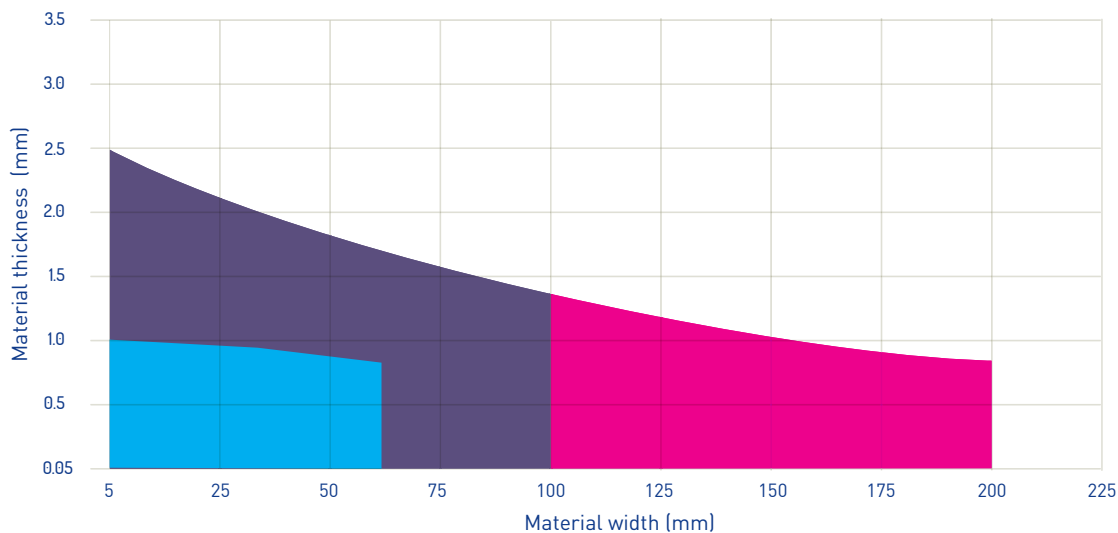

## PRODUCTS


J 341.xx1

J 341.xx2

J 380

Performance curve exemplary.  
Specific calculations on request.

TECHNICAL SPECIFICATIONS

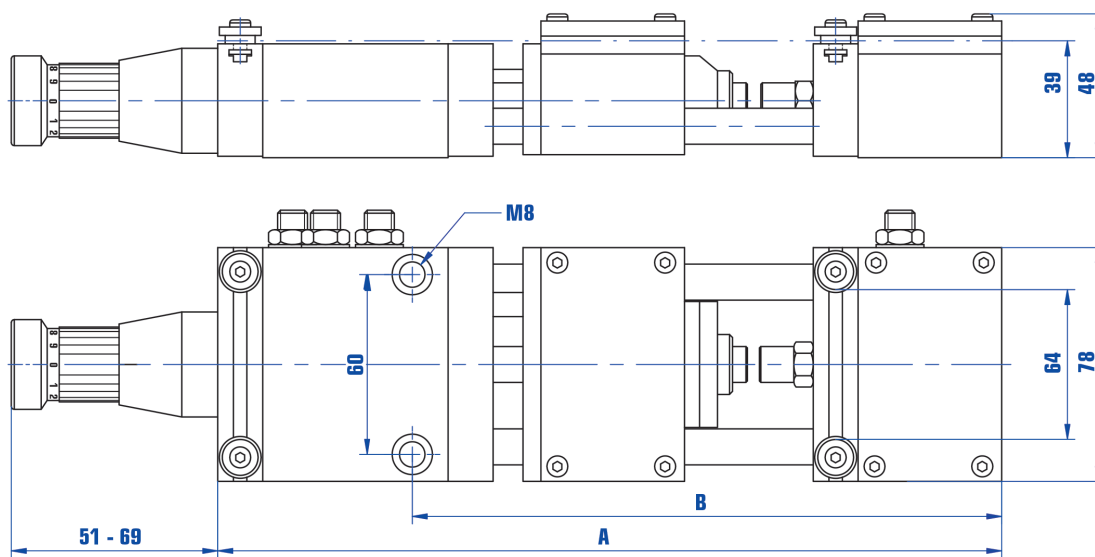

MODEL	J 380.030	J 380.060
Feed length (mm)	0-33	0-66
Distance A (mm)	262	328
Distance B (mm)	197	230
Max. stroke rate unloaded	300/min.	250/min.
Air consumption per cycle	0.3 l	0.55 l
Band width max. (mm)	64	
Band thickness max. (mm)	1.0	
Clamping force (at 6 bar)	580 N	
Traction force (at 6 bar) 275 N	275 N	

## SWITZERLAND

**Zehnder & Sommer AG**  
CH-3400 Burgdorf  
info@zehndersommer.com  
Tel +41 31 740 50 50

## GERMANY

**Zehnder & Sommer GmbH**  
DE-58452 Witten  
info@zehndersommer.de  
Tel +49 2302 276140

[zehndersommer.com](http://zehndersommer.com)  
[ZSswiss.com](http://ZSswiss.com)