

Pneumatic waste chopper

J 300

J 300.822


J 300.832

Scope of delivery


- Waste chopper complete with direct mounted 5/2-way solenoid valve
- Sound absorber including protective screen and materials guide panel
- Cutting force steplessly adjustable

Options


- Mounting bracket

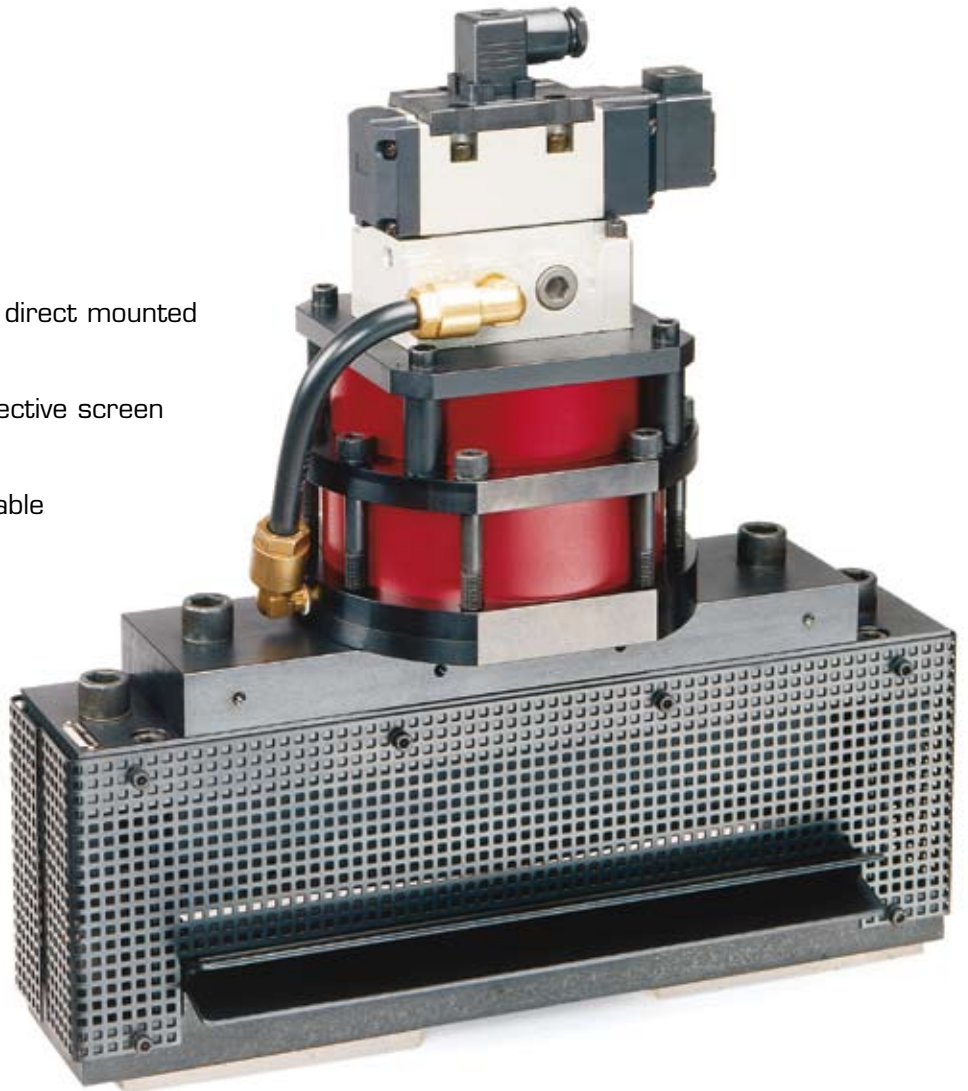

Performance diagram

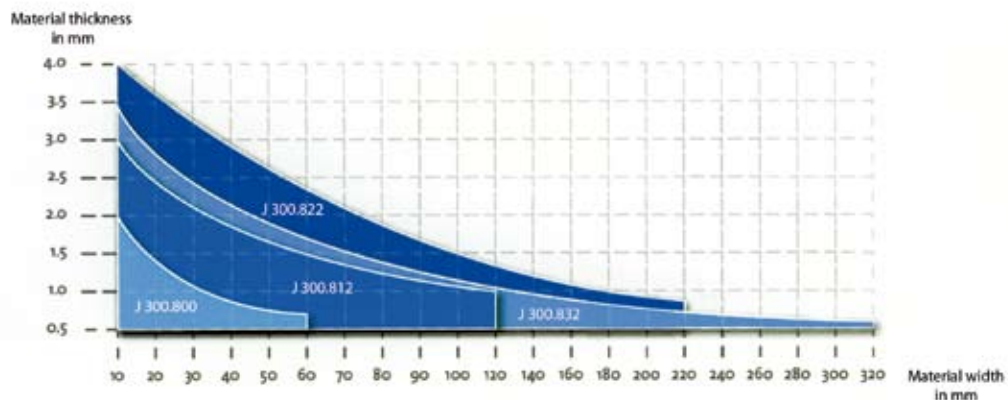

Technical modifications subject to change. Performance data depends on material.

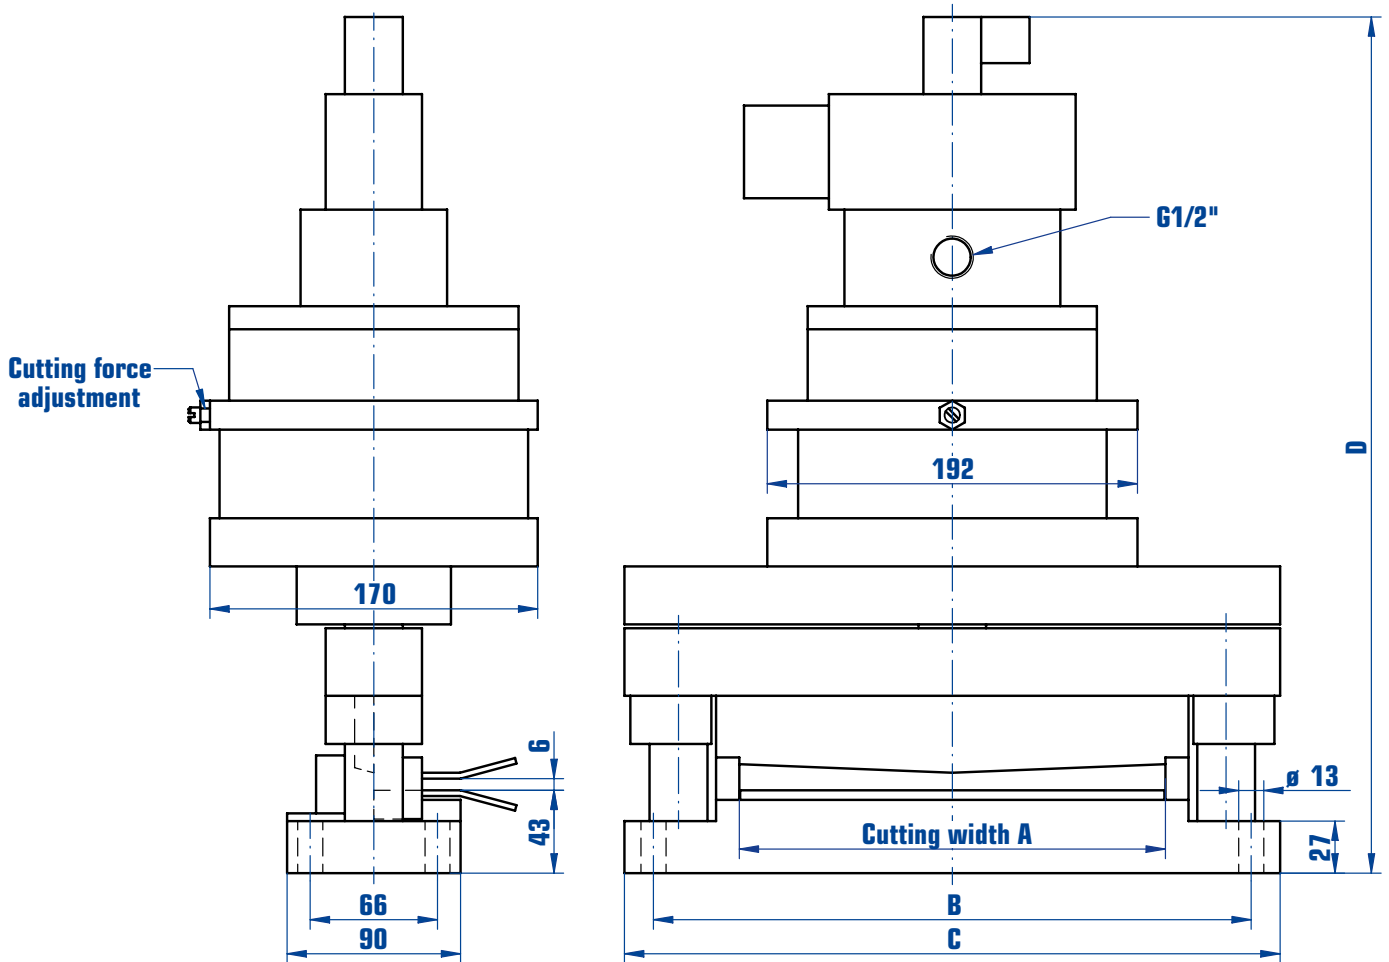

| Model order number | Cutting force (approx.) | A | B | C | D | Max. frequency non-load | Air consumption per switch play |
|--------------------|-------------------------|-----|-----|-----|-----|-------------------------|---------------------------------|
| J 300.822 | 39 kN | 220 | 310 | 340 | 444 | 180/min. | 4.5 l |
| J 300.832 | 39 kN | 320 | 410 | 440 | 474 | 160/min. | 4.5 l |

Technical modifications subject to change. Performance data depends on material.