

PNEUMATIC CUTTING SHEARS PTS

Cutting widths 120/220/320 mm



POWERFULL CUT

- Dynamic pneumatic impact system
- Knife made of special steel, regrindable
- Cutting force infinitely variable

PRECISE CUTTING



- Pillar guides with ball bearings
- Cutting adjustment for optimum cutting
- The cutter bar is reversible and 4 times usable as new

VARIABLE DRIVE

- Complete with 24 DC solenoid valve
- Drive via press cam
- Drive via pneumatic cylinder

VERSATILE USE


- Waste chopper
- Precision shears for cutting to length
- Custom made profile cuts



PNEUMATIC CUTTING SHEARS PTS



PERFORMANCE

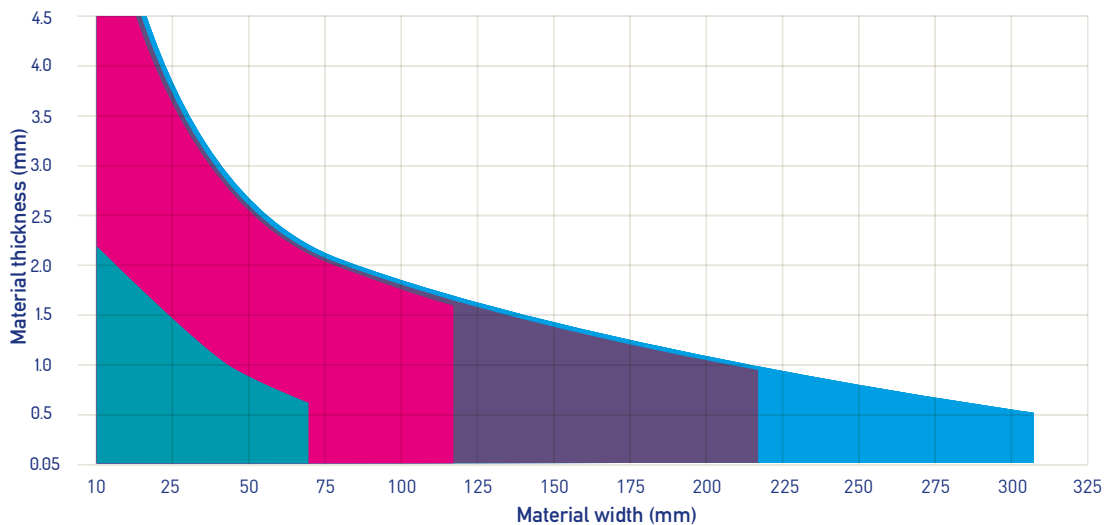

PRODUCTS

J 300.800



PTS 120

PTS 220

PTS 320

Performance curve exemplary.
Specific calculations on request.

TECHNICAL SPECIFICATIONS

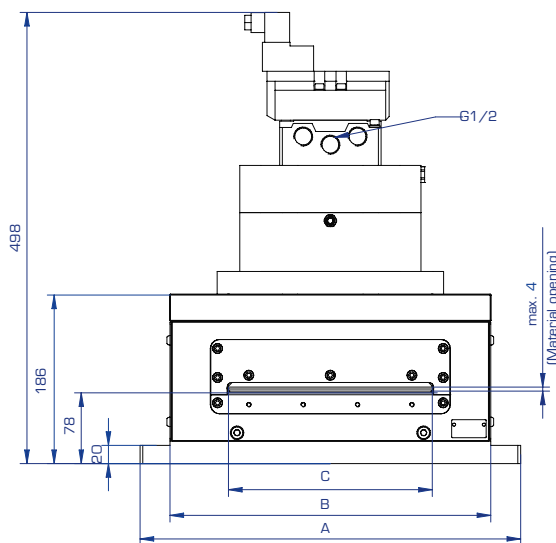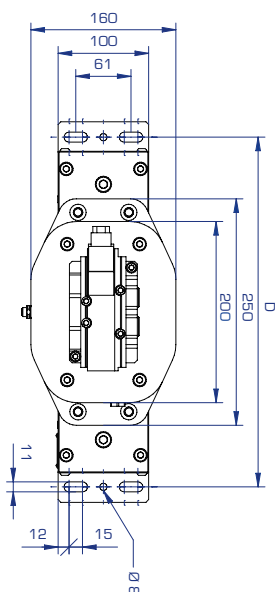

MODEL	PTS 120	PTS 220	PTS 320
Cutting width max. (mm)	120	220	320
Support width A (mm)	320	420	520
Body width B (mm)	254	354	454
Opening width C (mm)	120	220	320
Mounting distance D (mm)	286	386	486
Material height max.	4 mm		
Cutting pressure approx.	39 kN		
Air consumption	4.5 l		
Speed max. (1/Min.)	200	180	160

SWITZERLAND

Zehnder & Sommer AG
CH-3400 Burgdorf
info@zehndersommer.com
Tel +41 31 740 50 50

GERMANY

Zehnder & Sommer GmbH
DE-58452 Witten
info@zehndersommer.de
Tel +49 2302 276140

zehndersommer.com
ZSswiss.com